

Type AC.104

DIRECTLY HEATED OUTPUT VALVE

Price 16/-
(In I.F.S. 17/9)

Application.


Output valve in A.C. all-mains receivers having no previous low frequency stage.

Characteristics.

- *Anode Impedance 2,850 ohms
- *Amplification Factor 10
- *Mutual Conductance 2.5 mA./volt
- *At Anode Volts 100 ; Grid Volts, Zero.

Operating Data.

- Max. Filament Voltage 4.0 volts
- Filament Current 1.0 amp.
- Max. Anode Voltage 200 volts

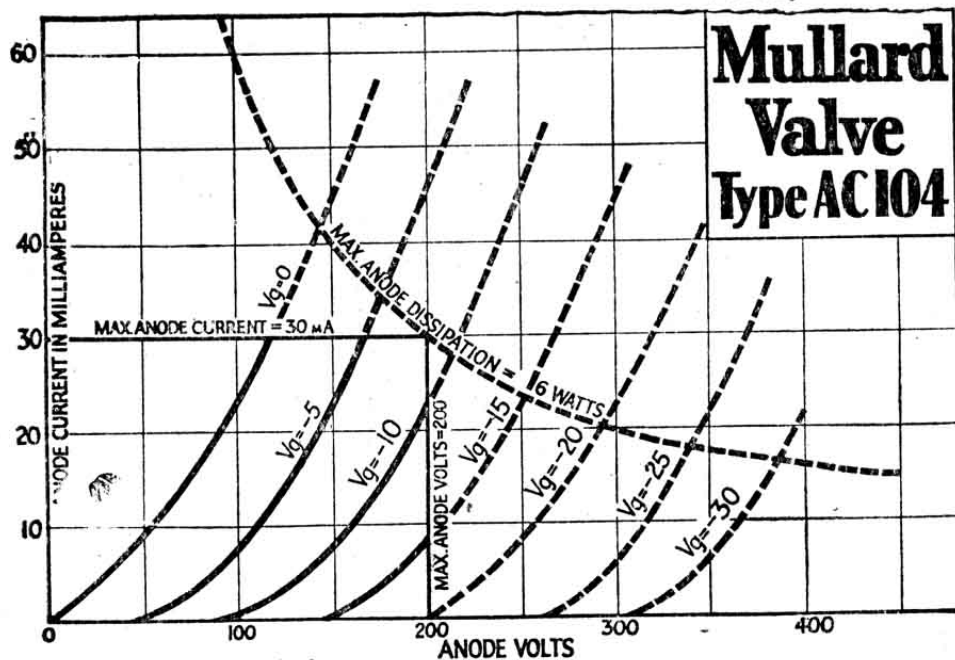

Grid Bias Table.

Anode Voltage.	Approx. Neg. Grid Bias Voltage.	Approx. Anode Current (mA).
150	10.0	8.5
175	12.0	9.75
200	14.0	11.0

Mullard the Master Valve