


Type P.M.5X.

MEDIUM IMPEDANCE VALVE

Price 8/6
(In I.F.S. 9/6)

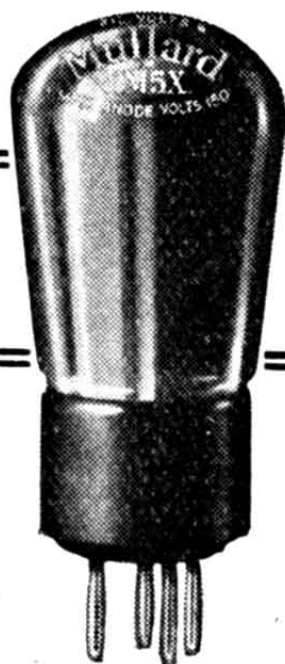

Application.

Detector or low frequency amplifier followed by transformer coupling.


Operating Data.

Max. Filament Voltage 6.0 volts
Filament Current 0.075 amp.
Max. Anode Voltage 150 volts

Characteristics.

*Anode Impedance 14,700 ohms
*Amplification Factor 17.5
*Mutual Conductance 1.2 mA./volt

*At Anode Volts 100; Grid Volts, Zero.

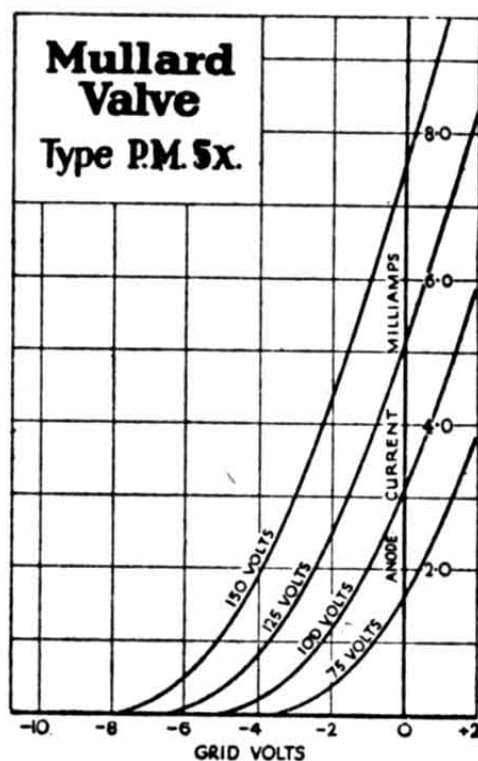

Grid Bias Table.

Anode Voltage.	Approx. Neg. Grid Bias Voltage.	Approx. Anode Current (mA).
75	1.5	0.8
100	1.5 to 3.0	1.2
125	3.0	1.6
150	3.0 to 4.5	2.0

Mullard the Master Valve