

Type DO.10

DIRECTLY HEATED OUTPUT VALVE

Price 25/-
(In I.F.S. 27/6)

Application.



Output valve for powerful receivers and amplifiers.

Characteristics.

- *Anode Impedance 2.850 ohms
- *Amplification Factor 2.4
- *Mutual Conductance 0.85 mA./volt
- *At Anode Volts 100; Grid Volts, Zero.

Operating Data.

- Filament Voltage 5.0 to 6.0 volts
- Filament Current 0.85 amp.
- Max. Anode Volts 400 volts

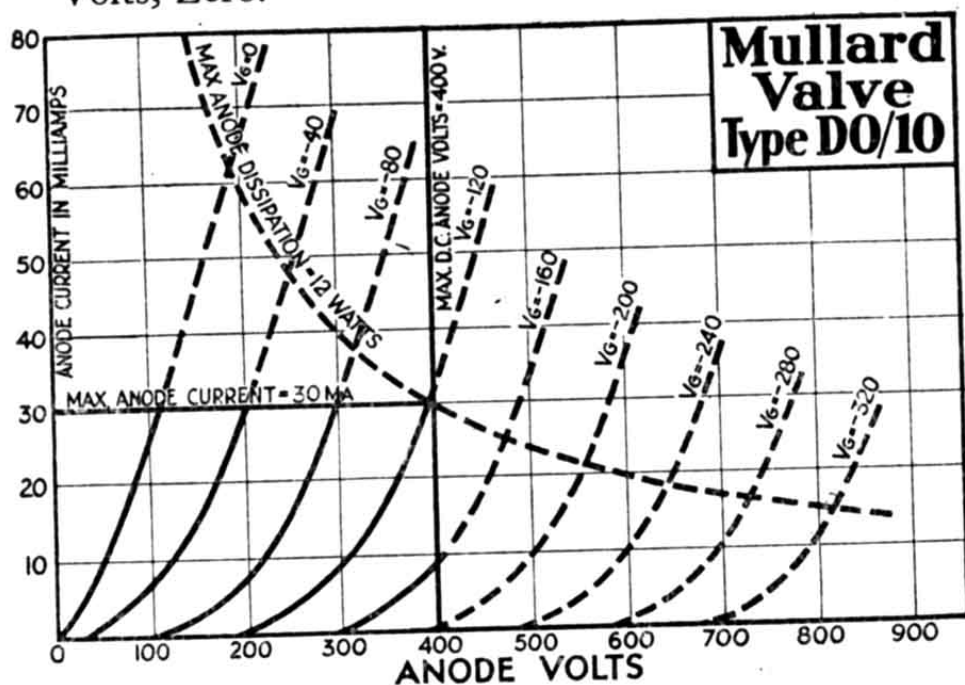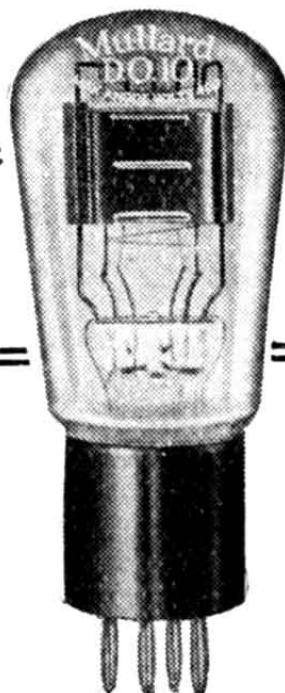

Grid Bias Table.

Anode Voltage.	Approx. Neg. Grid Bias Voltage.	Approx. Anode Current (mA).
100	30.0	12.0
200	60.0	17.0
300	90.0	25.0
400	130.0	25.0

Mullard the Master Valve