


Characteristics of OSRAM VALVES.

TYPE L.S.5.

DULL EMITTER.

Transmitting and Power Amplifying Valve.

ANODE CURRENT/GRID VOLTS CHARACTERISTIC.

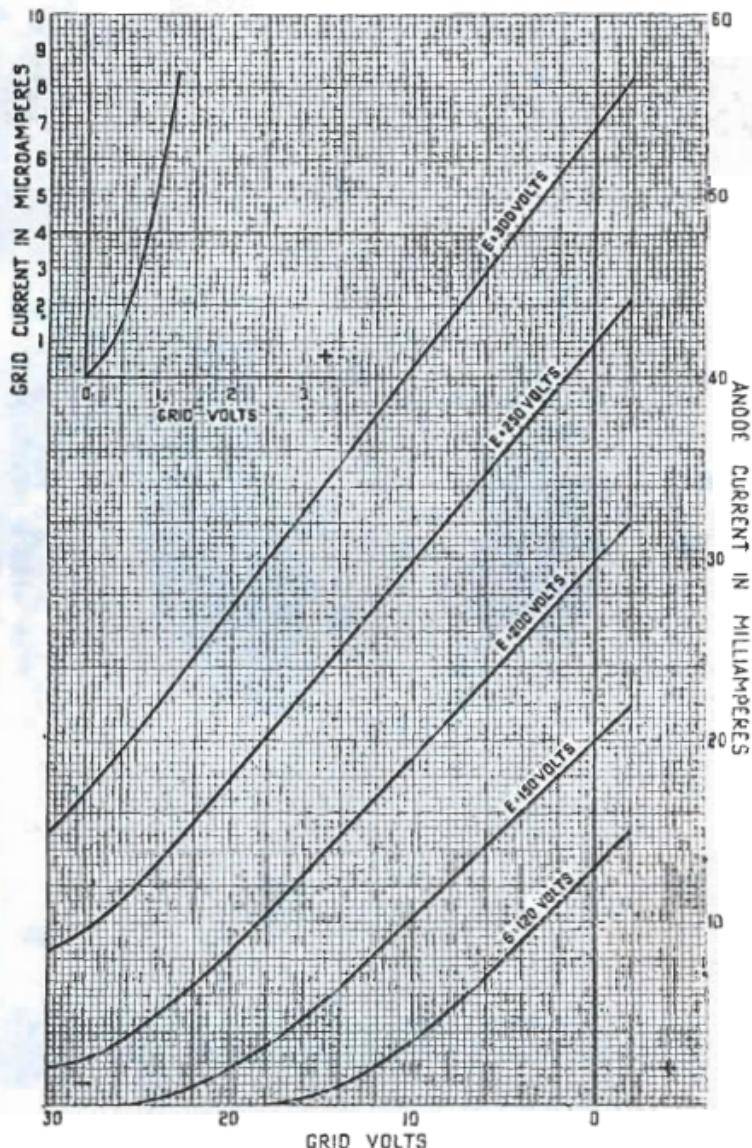

Filament Volts	4.5.
Filament Current	0.8 amps.
Anode Volts	60-400.
Impedance	6,000 ohms.
Amplification Factor	5.